
PRODUCTION MEETING · ANCIENT SPANISH MONASTERY CLOISTER

Shared Ball Cloister Tuning Map

Option 4 · with the tent

TUNEIT SCORE	FLOOR EVEN	BASS SWING	HEADROOM	BOXES
69 — Fair — out of 100	73% — within ±3 dB	14.3 dB — bass, 50-80 Hz	+7.8 dB — 98 dB show	15 — Subwoofer block,

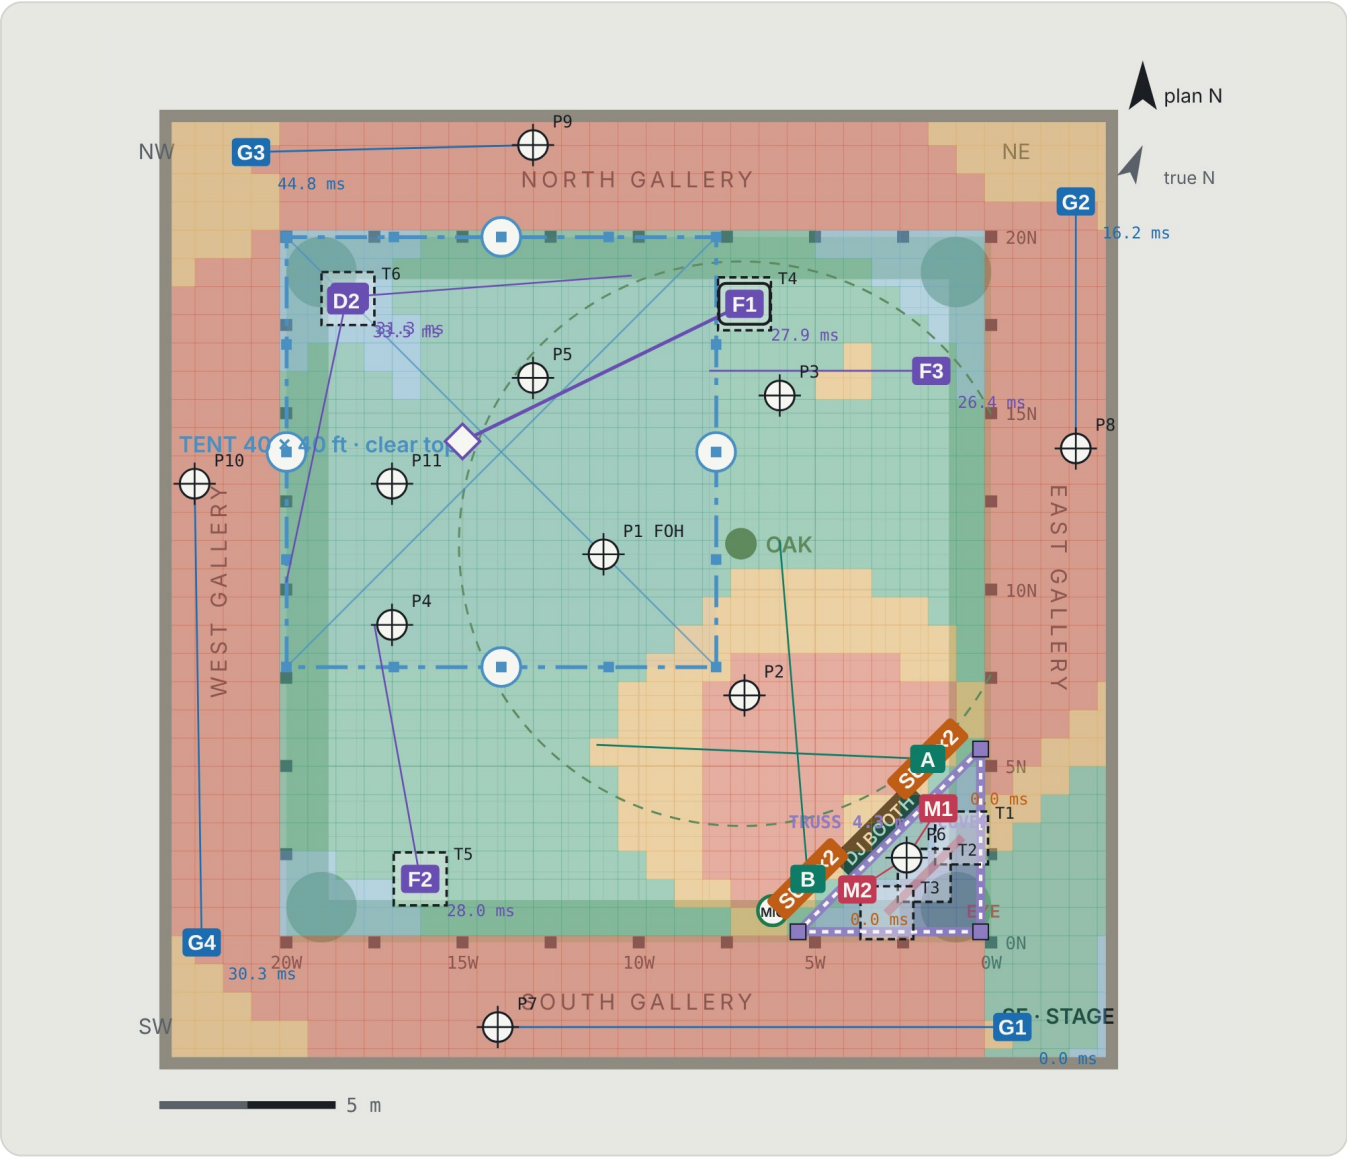

The plan as shown on the map, with the layers that were switched on. Coverage colours compare each spot with P1 (FOH).

01 · SUMMARY

What this layout delivers

The team layout with the Rumbas 40 × 40 ft clear-top frame tent (3.05 m legs) over the floor north-west of the oak, from the north arcade to the west arcade; FOH sits under it. Tower T4 and fill F1 move 1.5 m east so the tower and its lights clear the tent edge. Main B drops to 2.5 m, both mains re-aimed, fills and delays trimmed. Keep beam lights on T6 off the clear roof.

- 73% of the dance floor sits within ±3 dB of P1 (FOH), 92% within ±6 dB.
- Bass varies 14.3 dB across the floor, so expect some build-up and gaps.
- Tops on the stage: -5.9 dB against the floor.
- Level available at P1 (FOH): about 106 dB, +7.8 dB over a 98 dB show.
- Every rule kept: nothing on the dance floor.
- Tent: Rumbas Frame Tent, clear top, 40 × 40 ft, 3.1 m legs, about 5.6 m at the peak (confirm with Rumbas). Roof bounce on the floor -22.4 dB against the direct sound; sides open. Nothing hangs from the tent frame unless Rumbas signs off the loads.
- Air 24 °C, 70% humidity, sound at 345.8 m/s.

02 · TOWERS

Towers and what they carry

TOWER	NAME	POSITION (FROM	HEIGHT	LIGHTS ON TOP	SPEAKERS	SPEAKER LOAD	MASKING
T1	Eye, east leg	3.0 N, 0.8 W	3.05 m	Sharpy Beam	none	~ 0 kg	Clad in the eye scenic
T2	Eye, centre	1.9 N, 1.9 W	3.05 m	Robe Mega Pointe through the pupil	none	~ 0 kg	Clad in the eye scenic
T3	Eye, south leg	0.8 N, 3.0 W	3.05 m	Sharpy Beam	none	~ 0 kg	Clad in the eye scenic
T4	North wall	18.1 N, 7.0 W	3.05 m	Sharpy Beam + laser, hazer at base	F1 @ 2.6 m	~ 30 kg	Scrim wrap, open speaker front
T5	SW corner	1.8 N, 16.2 W	3.05 m	Sharpy Beam + laser, hazer at base	F2 @ 2.6 m	~ 30 kg	Scrim wrap, open speaker front
T6	NW corner	18.3 N, 18.3 W	3.05 m	Sharpy Beam + laser, hazer at base	D1 @ 2.6 m, D2 @ 2.6 m	~ 60 kg	Full drape on the corner faces: soaks the corner echo

03 · SPEAKERS

Speaker schedule

Position from the reference shown on the map. Delays and trims as set in the map; confirm by measurement.

ID	UNIT	MOUNTED	POSITION	HEIGHT	AIM (PLAN)	TILT	DELAY MS	TRIM DB	TUNE AT
S1	2 × L-Acoustics 18" sub, cardioid	Floor	5.2 N, 1.8 W	0.5 m	stage axis	-	0.0	-3	P1
S2	2 × L-Acoustics 18" sub, cardioid	Floor	1.8 N, 5.2 W	0.5 m	stage axis	-	0.0	-3	P1

ID	UNIT	MOUNTED	POSITION	HEIGHT	AIM (PLAN)	TILT	DELAY MS	TRIM DB	TUNE AT
A	L-Acoustics 15" coaxial top	Pole on sub	5.2 N, 1.8 W	2.8 m	272°	7.3° down	0.1	0	P1
B	L-Acoustics 15" coaxial top	Pole on sub	1.8 N, 5.2 W	2.5 m	355°	5.3° down	0.1	0	P1
F1	L-Acoustics 15" coaxial top	T4 North wall	18.1 N, 7.0 W	2.6 m	244°	6.4° down	27.9	-9.5	P5
F2	L-Acoustics 15" coaxial top	T5 SW corner	1.8 N, 16.2 W	2.6 m	350°	7.8° down	28.0	-8	P4
F3	L-Acoustics 15" coaxial top (ADD to FPS quote)	Pole on sub	16.2 N, 1.7 W	2.4 m	270°	7.2° down	26.4	-8	P3
D1	L-Acoustics 15" coaxial top	T6 NW corner	18.3 N, 18.2 W	2.6 m	86°	7.1° down	31.3	-8.5	P5
D2	L-Acoustics 15" coaxial top	T6 NW corner	18.2 N, 18.3 W	2.6 m	192°	7.0° down	33.5	-9	P11
G1	RCF EVOX 8 column array	Stand	-2.4 N, -0.6 W	1.8 m	270°	0.8° down	0.0	0	P7
G2	RCF EVOX 8 column array	Stand	21.0 N, -2.4 W	1.8 m	180°	1.6° down	16.2	-5.1	P8
G3	RCF EVOX 8 column array	Stand	22.4 N, 21.0 W	1.8 m	89°	1.4° down	44.8	-4.9	P9
G4	RCF EVOX 8 column array	Stand	0.0 N, 22.4 W	1.8 m	359°	0.9° down	30.3	0	P10
M1	JBL SRX812P	Stand	3.8 N, 1.5 W	1.4 m	213°	6.9° up	-	0	P6
M2	JBL SRX812P	Stand	1.5 N, 3.8 W	1.4 m	57°	6.9° up	-	0	P6

04 · TUNING POINTS

Where to measure

Type each reading into the map; the Off by column shows how far the model is from the room.

POINT	WHERE	TARGET	USE IT TO	PREDICTED	MEASURED	OFF BY
P1	FOH reference	98-100 dB(A) LAeq at peak	System EQ for the mains; sub-to-top alignment	98.0 dB	-	-
P2	Front of floor	No more than P1 + 4 dB	Front rows not overpowered	105.5 dB	-	-
P3	NE floor corner	P1 ± 3 dB	Set F3	99.7 dB	-	-
P4	West band	P1 ± 3 dB	Set F2	97.7 dB	-	-
P5	North band	P1 - 3 to 0 dB	Set F1 and D1	97.4 dB	-	-
P6	DJ position	95-100 dB(A) from the monitors	Sub quieter here than at P2	94.1 dB	-	-
P7	South gallery	82-86 dB(A)	Set G1	92.2 dB	-	-
P8	East gallery	82-86 dB(A)	Set G2	92.5 dB	-	-
P9	North gallery	82-86 dB(A)	Set G3	91.5 dB	-	-

POINT	WHERE	TARGET	USE IT TO	PREDICTED	MEASURED	OFF BY
P10	West gallery	82-86 dB(A)	Set G4	92.0 dB	-	-
P11	West band	P1 ± 3 dB	Set D2	96.5 dB	-	-

05 · ON SITE

Tuning sequence

- 1. Walk and mark. Tape every tower, speaker and tuning point from the SE pier using the N / W numbers.
- 2. Build and mask the towers. Ballast, light on top, speakers hung under it at the listed height and tilt, scrim on.
- 3. Polarity and signal check. Pink noise through every box one at a time.
- 4. Mains at P1. System EQ for the stone: trim low-mid build-up, then top end. Set the FOH reference level.
- 5. Subs to tops at P1. Align phase at the crossover; confirm the cardioid rejection at P6.
- 6. Fills and delays at their points. Mains on, speaker on: set delay so the stage leads, then level to land within ±3 dB of P1.
- 7. Galleries at P7 to P10. Delay, then level to 82-86 dB(A).
- 8. Booth and singer. Monitors with a DJ on the decks; ring out the opera mic with everything running.
- 9. Full walk with music. Floor, galleries, booth. Log the final values and lock the processors.

06 · SIGN-OFF

Agreed for the show

TECHNICAL DIRECTION

DJ UZO

signature _____ date _____

AUDIO VENDOR

signature _____ date _____

VENUE / PRODUCTION

signature _____ date _____